

HIGH CUT RESISTANT PU COATED GLOVE WITH STEEL FIBRE

Outstanding cut resistance allowing protection in the most risky applications. PU coating protects the hand from abrasion and grease, delivering effective long lasting grip.

FEATURES

- › Cut resistant: Level F (EN 388:2016) / A6
- › A flexible and comfortable glove offering great dexterity
- › HPPE on the inside provides comfort and protection
- › Steel is fully encapsulated with nylon on the outside to strengthen the protection against burrs and sharp edges
- › PU coating gives exceptional abrasion resistance and sensitivity allowing workers to handle small pieces
- › Contact heat protection up to 100°C / 212°F for a short period (15 sec max)
- › Seamless knit prevents irritation
- › Designed for easy movement and continuous wear



SUITABLE FOR

- | | |
|--|---|
| <p>Typical Industries</p> <ul style="list-style-type: none"> ▪ Automotive ▪ Construction ▪ Logistics ▪ Maintenance ▪ Manufacturing ▪ Metal Industry | <p>Suitable Applications</p> <ul style="list-style-type: none"> ▪ Assembly ▪ Handling sharp and greasy parts ▪ Machining ▪ Bodywork ▪ Precision mechanics ▪ Metal stamping |
|--|---|

CERTIFICATION

<p>CAT II</p>	<p>EN 407:2020</p> <p>X1XXXX</p>	<p>EN 388:2016 + A1:2018</p> <p>4X43F</p>	<p>ANSI/ISEA 105</p>
<p>See overleaf for explanation</p>			

PRODUCTION INFORMATION

MATERIALS	LINER:	13 gauge HPPE, steel fibre, nylon
	COATING:	Polyurethane (PU)
COLOUR	Grey/black	
LENGTH (mm)	250 (Size Dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
6/XS	SKG00085FB	10 pairs per paper wrap
7/S	SKG00085FD	
8/M	SKG00085FF	
9/L	SKG00085FH	
10/XL	SKG00085FJ	120 pairs per case
11/XXL	SKG00085FL	


RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal (beyond 100C / 212F), electrical, chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016
PERFORMANCE LEVELS*

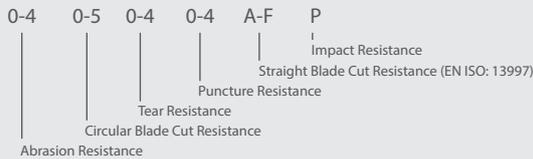


*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter



HEAT AND FIRE
EN 407

PERFORMANCE LEVELS

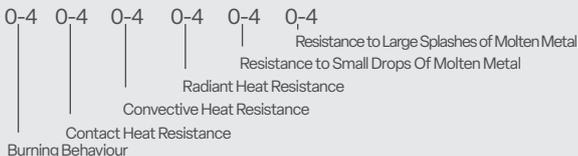

CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

© 2023 Globus (Shetland) Ltd | SKY-DATA-SAPP-IRON-1023,1

EU Type-Examination Certificate issued by CCQS Certification Services Limited, Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin, D15 AKK1, Ireland (Notified Body No 2834)

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.